

Band Pass Filter

WGLB-02593

50Ω

2496 to 2690 MHz

Ver. A
2019.8.8


Maximum Rating

Operating Temperature	-55°C~+100°C
Storage Temperature	-55°C~+100°C
RF Input Power	5W max at 25°C

Pin Connections

RF Input	1
RF Output	4
Ground	2,3


Outline Drawing

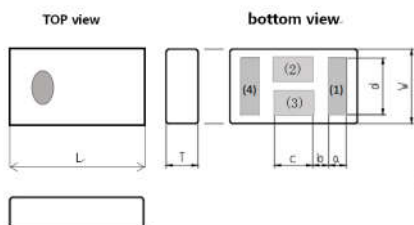

Outline Dimension(mm)

L	W	T
2.00±0.15	1.25±0.10	0.62±0.10
a	b	c
0.275±0.10	0.25±0.10	0.60±0.10
d		
0.95±0.15		

PCB Land Pattern(mm)

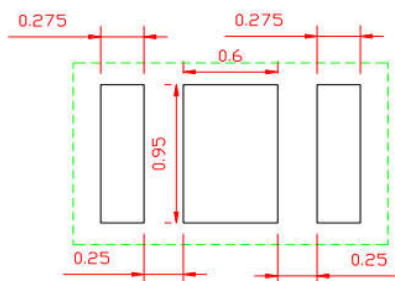

SUGGESTED LAYOUT


TOLERANCE TO BE WITHIN ±0.05mm

Features


- High Performance
- Small Size
- Wide Band
- Ultra Low I.L.
- Temperature Stable
- LTCC Structure

Application

- Harmonic Rejection
- Transmitters/Receivers
- Lab Use



RoHS Compliant

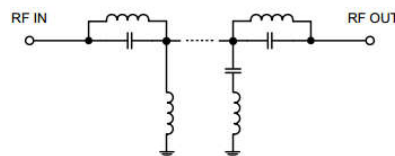

Functional Schematic



Electrical Specifications⁽¹⁾ at 25°C

Parameter		Frequency (MHz)	MIN	Typ.	MAX	Unit
Pass Band	Center Frequency	-	-	2593	-	MHz
	Insertion Loss	2496-2690	-	1.5	2.5	dB
	VSWR	2496-2690	-	1.5	2.0	:1
Stop Band	Rejection Loss	500-2000	20	30	-	dB
		2125-2313	18	30	-	dB
		2992-10000	12	25	-	dB

(1) Test on our Demo Board.

Typical Performance at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
500	51	858
1000	45.77	481.7
2313	31.84	16.68
2496	1.60	1.217
2600	1.23	1.026
2690	1.414	1.29
2992	20.99	27.27
3800	33.127	212.2
4000	34.7	256.1
5000	43.9	371.1
5100	45.08	374.1
6000	64.8	366.3
8000	43.52	292.56
10000	43.7	217.9
12000	27.1	80.66

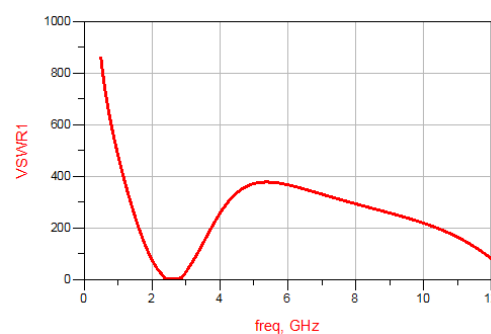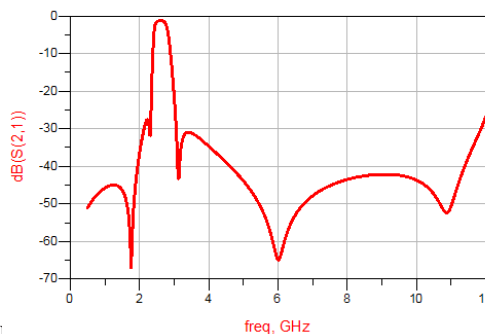

a. The specifications are tested at 25°C±5°C, relative humidity 55~75%.
b. Other quality and characteristic not specify in this datasheet.
Please contact us for detail requirements.



Well Genius Technology (Shanghai) LTD.

Room 904, Block B, Hi-Tech Building, No.900 Yi Shan Rd, Shanghai, P.R.C Tel: (021) 6495 8888 Fax: (021) 5423 5889 Zip Code: 200233