

# Low Pass Filter

## WGLL-01000-A

50Ω

DC to 1000 MHz

Ver. A  
2018.5.20


### Maximum Rating

Operating Temperature	-55°C~+100°C
Storage Temperature	-55°C~+100°C
RF Input Power	5W max at 25°C

### Pin Connections

RF Input	1
RF Output	3
Ground	2,4


### Outline Drawing

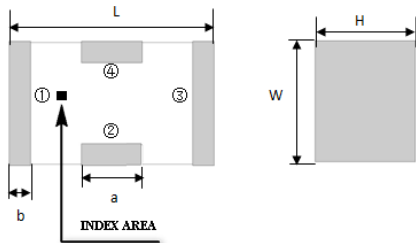

### Outline Dimension(mm)

W	L	H
1.6±0.2	3.2±0.2	1.0±0.2
a	b	
0.8±0.1	0.5±0.1	

### PCB Land Pattern(mm)

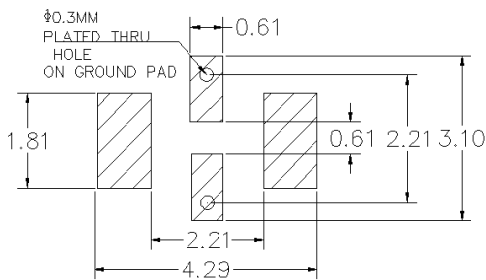

SUGGESTED LAYOUT


TOLERANCE TO BE WITHIN ±0.05mm

### Features

- High Performance
- Small Size
- Wide Band
- Ultra Low I.L.
- Temperature Stable
- LTCC Structure

### Application

- Harmonic Rejection
- Transmitters/Receivers
- Lab Use



RoHS Compliant



Functional Schematic



### Electrical Specifications<sup>(1)</sup> at 25°C

Parameter	Frequency (MHz)	MIN	Typ.	MAX	Unit	
Pass Band	Insertion Loss	DC-1000	-	0.8	1.0	dB
	Freq. Cut-off	1320	-	3.0	-	dB
	VSWR	DC-1000	-	1.2	1.5	:1
Stop Band	Rejection Loss	1500	20	30	-	dB
		200-5500	20	30	-	dB
		6000	15	25	-	dB

(1) Test on our Demo Board.

### Typical Performance at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	0.08	1.03
500	0.4	1.41
1000	0.69	1.16
1320	3.07	1.64
1500	30.08	11.6
2000	35.21	20.64
2500	39.78	31.22
2750	58.57	39.64
3250	37.05	61.03
3500	35.59	70.96
4000	34.60	86.33
4600	35.74	99.23
5000	37.69	107.56
5500	43.16	113.24
6000	51.37	106.29

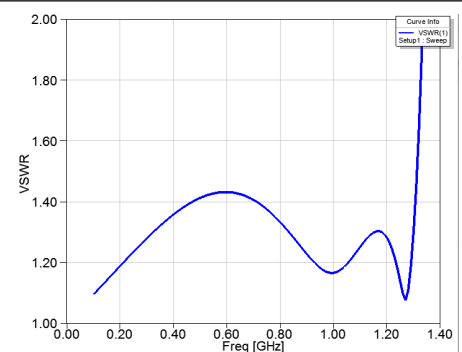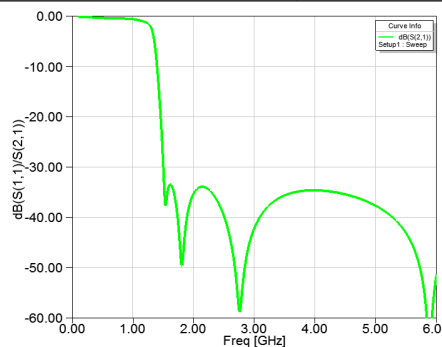

### Notes:

- The specifications are tested at 25°C±5°C, relative humidity 55~75%.
- Other quality and characteristic not specify in this datasheet. Please contact us for detail requirements.



Well Genius Technology (Shanghai) LTD.

Room 904, Block B, Hi-Tech Building, No.900 Yi Shan Rd, Shanghai, P.R.C Tel: (021) 6495 8888 Fax: (021) 5423 5889 Zip Code: 200233