

# Low Pass Filter

## WGLL-03600

50Ω

DC to 3600 MHz

Ver. A

2019.05.13


### Maximum Rating

Operating Temperature	-55°C~+100°C
Storage Temperature	-55°C~+100°C
RF Input Power	5W max at 25°C

### Pin Connections

RF Input	1
RF Output	3
Ground	2,4


### Outline Drawing

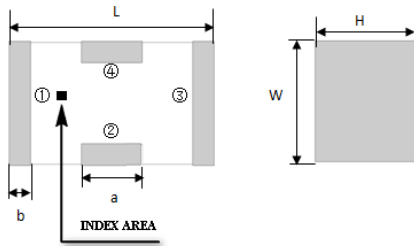

### Outline Dimension(mm)

W	L	H
1.6±0.2	3.2±0.2	1.0±0.2
a	b	
0.8±0.1	0.5±0.1	

### PCB Land Pattern(mm)

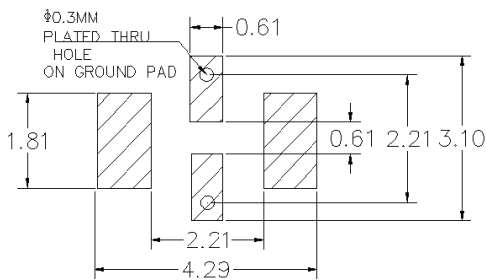


#### SUGGESTED LAYOUT

TOLERANCE TO BE WITHIN ±0.05mm

### Features

- High Performance
- Small Size
- Wide Band
- Ultra Low I.L.
- Temperature Stable
- LTCC Structure



RoHS Compliant

### Application

- Harmonic Rejection
- Transmitters/Receivers
- Lab Use



### Functional Schematic



### Electrical Specifications<sup>(1)</sup> at 25°C

Parameter	Frequency (MHz)	MIN	Typ.	MAX	Unit	
Pass Band	Insertion Loss	DC-3600	-	0.9	1.2	dB
	Freq. Cut-off	4090	-	3.0	-	dB
	VSWR	DC-3600	-	1.2	1.5	:1
Stop Band	Rejection Loss	4550	20	30	-	dB
		4790-6000	20	30	-	dB
		8000	20	30	-	dB

(1) Tested on Demo Board.

### Typical Performance at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
100	0.07	1.02
500	0.09	1.08
1000	0.14	1.14
2000	0.23	1.18
3000	0.35	1.2
3600	0.74	1.17
4000	1.63	1.45
4100	3.32	5.56
4500	33.1	17.18
5000	35.59	35.43
5500	45.91	39.97
6000	40.2	46.23
7000	44.32	75.4
8000	45.53	96.4
9000	41.7	94.4

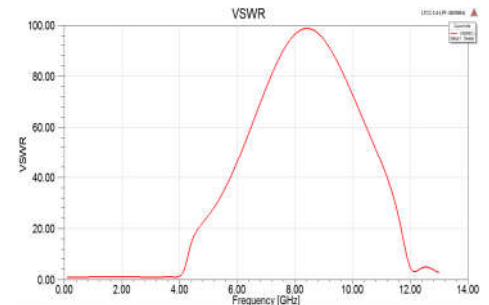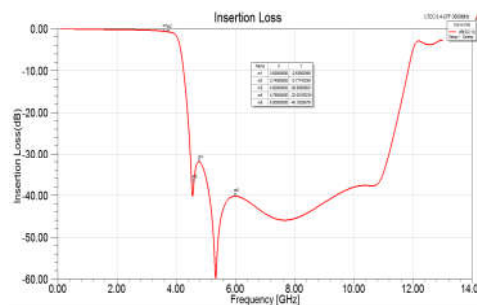

### Notes

- The specifications are tested at 25°C±5°C, relative humidity 55~75%.
- Other quality and characteristic not specify in this datasheet. Please contact us for detail requirements.



**Well Genius Technology (Shanghai) LTD.**

Room 904, Block B, Hi-Tech Building, No.900 Yi Shan Rd, Shanghai, P.R.C Tel: (021) 6495 8888 Fax: (021) 5423 5889 Zip Code: 200233