

规格书 V1

产品名称：1 : 4 Balun

产品型号：WGTC4-1W


1. Electrical Specification

Ratio (Secondary/Primary)	Frequency (MHz)	Insertion Loss		
		3dB MHz	2dB MHz	1dB MHz
4	3-800	3-800	5-400	10-100


Feature:

- Surface mount
- 260°C reflow compatible
- RoHS* compliant
- Can be used in both
50Ω and 75Ω systems

2. Outline Drawing / Dimensions (Unit: mm, Tolerance±0.3mm)

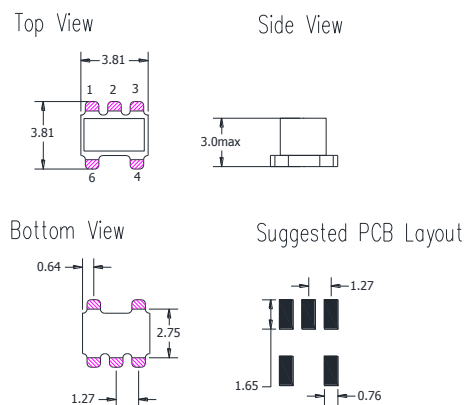

Unit: mm
Tolerance: ±0.3mm




PIN CONFIGURATION

PIN	FUNCTION
1	Secondary dot
2	Secondary CT
3	Secondary
4	Primary
6	Primary dot

Absolute Maximum Ratings	
RF Power	1W
DC Current	30mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

Actual test parameter.

Insertion Loss

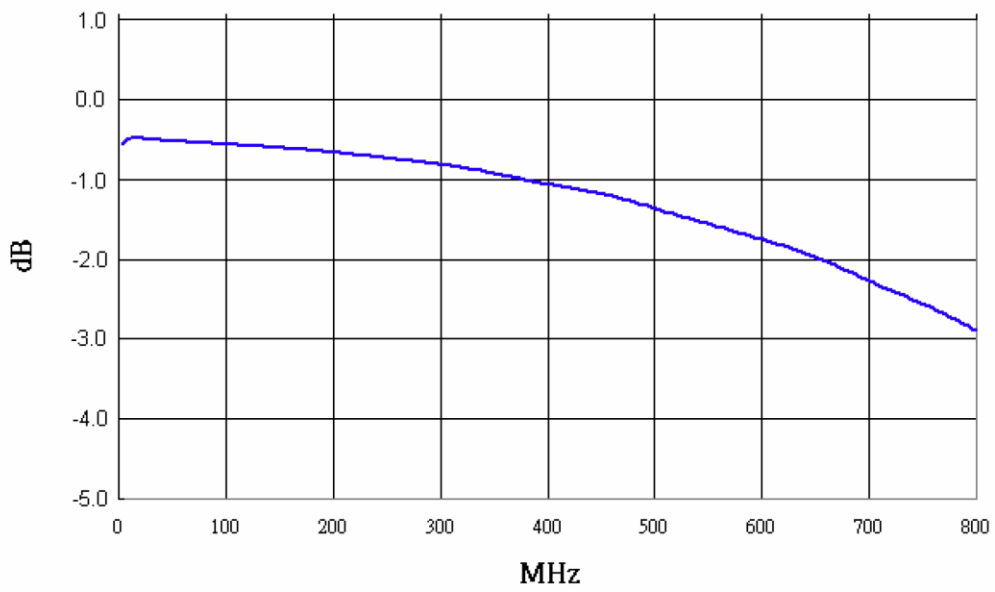

Input Return Loss

